

ELECTRIC ARTICULATING BOOM LIFTS

AB10ERJN(AB320ERJN)

Compliant with AS 1418 · 10 standards

PRODUCT HIGHLIGHTS

Electric Control System

- Equipped with the same Rexroth controllers used across Sinoboom boom lifts, this machine delivers on safety and reliability and compliant with EN ISO 13849 and achieving Performance Level D

Compact Design

- With only 1.19m(3'11") narrow chassis and 1.99m(6'6") stowed height, zero tailswing, suitable for working confined spaces

Automatic Pothole Guard

- As booms ascend the pothole guard automatically springs into action, shielding you from uneven ground

5 Inch LED Screen

- Excellent human machine interface experience with a 5 inch LED screen, and one button for fault diagnosis on the screen



Standard Features		
2WD×2WS	AGM maintenance-free battery	Telematic ready
Hydraulic platform leveling	Fault diagnosis system	Battery isolator
Flashing beacon	5-in display screen	Secondary guarding system
Proportional control	Emergency lowering system	White noise alarm
Tilt protection system	Weight management system	Half-mesh for platform
Flashing beacon	Fault diagnosis system	Non-marking tires
Manual storage box		
Options & Accessories		
Mine spec	Lithium Batteries	Telematic device
AC power to platform	Driving light	

SINOBOOM™

PARTNERS IN ACCESS™

🌐 **SINOBOOM.AU** | 📞 **03 8905 1550**



HO: BRISBANE – 39 ALTA ROAD, CABOOLTURE QLD 4510 | SYDNEY – 1/3 VOYAGER CT, GLENDENNING NSW 2761
MELBOURNE – 32-34 MARNI, DANDENONG SOUTH VIC 3175

ELECTRIC ARTICULATING BOOM LIFTS

AB10ERJN(AB320ERJN)

Compliant with AS 1418 · 10 standards

Model	AB10ERJN(AB320ERJN)
Dimensions	
Max Platform Height	9.62 m (31'7")
Max Working Height	11.62 m (38'1")
Max Horizontal Outreach	6.3 m (20'8")
Max Up and Over Clearance	4.6 m (15'1")
A Stowed Length / Transport Length	5.84 m/4.25 m (19'2"/13'11")
B Overall Width	1.19 m (3'11")
C Stowed Height / Transport Height	1.99 m/2.70 m (6'6"/8'10")
D Wheelbase	1.65 m (5'5")
Ground Clearance (Pothole Guard Stowed/Deployed)	0.07 m/0.03 m (2.8"/1.1")
Platform Size (L×W×H)	1.15 m×0.76 m×1.1 m (45.3"×30"×43.3")
Performance	
Max Platform Capacity	230 kg (507 lbs)
Max Platform Occupants	2 persons
Drive Speed (Stowed)	0 ~ 5 km/h (0 ~ 3.1 mph)
Drive Speed (Raised)	0 ~ 0.8 km/h (0 ~ 0.5 mph)
Gradeability	35%
Turntable Rotation	355° non-continuous
Jib Length	1.42 m (4'8")
Platform Rotation	180°
Horizontal Jib Rotation	180°
Vertical Jib Rotation	136° (Up +64° Down -72°)
Tilt Rating	3°
Turning Radius (Inside/Outside)	1.7 m/3.25 m (5'7"/10'8")
Turntable Tail-swing	0 m
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	22×7×17.75" (Solid non-marking)
Power	
Drive×Steer	2 WD × 2 WS
Batteries (Number×Voltage, Capacity)	8×6 V, 290 Ah (5 hr)/330 Ah (20 hr) AGM
Hydraulic Tank Capacity	20 L (4.4 gal (UK)/5.3 gal (US))
System Voltage	12 V DC
Weight	
Weight	6,760 kg (14,903 lbs)
Standards Compliance	AS 1418 · 10

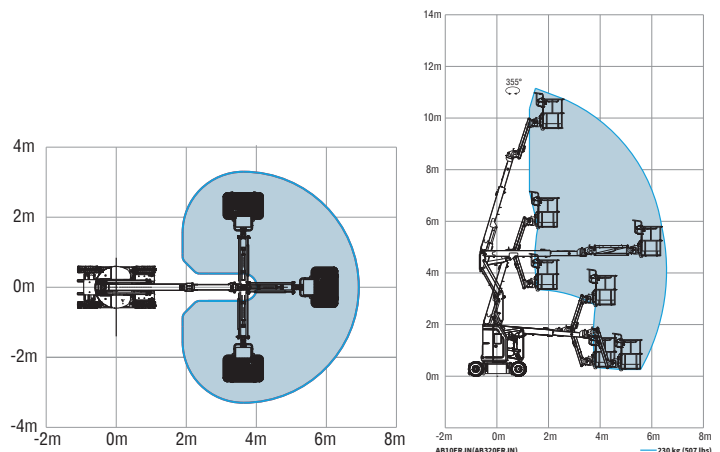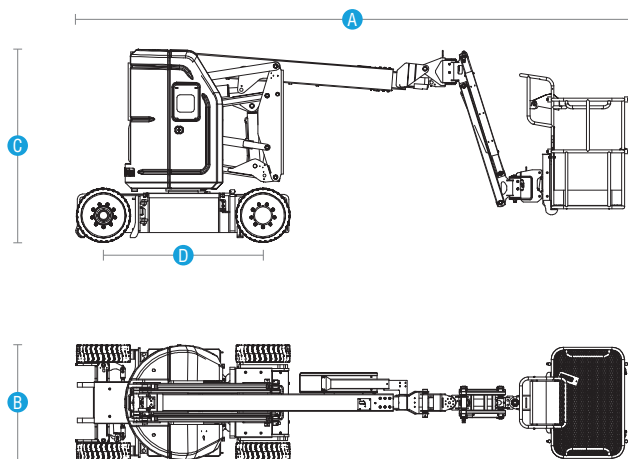

This document is provided for information purposes only and reflects product information available at the time of publication. Sinoboom Intelligent Equipment Pty Ltd reserves the right to change specifications, designs, and equipment without notice and makes no representations or warranties. Where indicated, AS-marked platforms conform to AS/NZS 1418.10:2011. Refer to the applicable Sinoboom Operating, Maintenance, and Parts Manuals for correct use and procedures. 03.2026